

2,5 kW



3,5 kW

5,0 kW

7,1 kW

Please see pages 40 & 41
For Controller Options

NEW 1-WAY CASSETTE

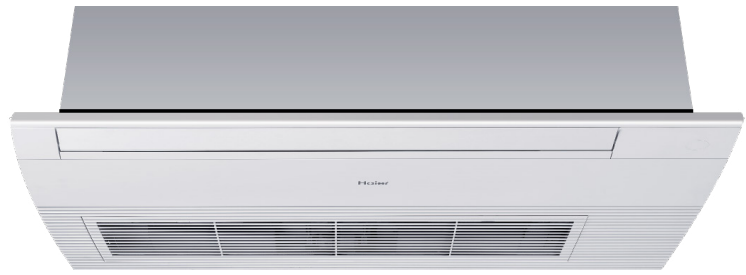

Compact Design



Integrated Wi-Fi control



Fresh Air



UVC Sterilisation

- Shallow Design (185 mm)
- Integrated Wi-Fi control
- 'Fresh air' knockout is incorporated in the chassis to allow fresh air introduction

Indoor Unit	Model		AB25S2SA1FA(H)	AB35S2SA1FA(H)	AB50S2SA1FA(H)	AB71S2SA1FA(H)
Performance data						
Output power - COOLING	nom (min-max)	kW	2,6	3,5	5	6,9
Output power - HEATING	nom (min-max)	kW	3,2	4,0	5,5	7,0
Power supply		Ph/V/Hz	1/220~240/50/60	1/220~240/50/60	1/220~240/50/60	1/220~240/50/60
Treated air volume	(H/M/L/Q)	m ³ /h	500/450/400/350	560/500/450/400	850/700/550/450	900/700/600/500
Indoor Unit						
High sound power		dB	62	64	65	67
Sound pressure		dB(A)	43/40/37/34	45/42/39/36	47/44/41/38	49/46/43/40
Net dimensions	WxDxH	mm	850/540/185	850/540/185	1170/540/185	1170/540/185
Packaging dimensions	WxDxH	mm	1043/648/270	1043/648/270	1363/648/270	1363/648/270
Net/gross weight		kg	20,8/24,9	20,8/24,9	26/31	27/32
Installation data						
Liquid pipe	Ø	mm (inch)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	9,52 (3/8)
Gas pipe	Ø	mm (inch)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)
Panel	Model		P1B-1028IB	P1B-1028IB	P1B-1348IB	P1B-1348IB
Panel Net dimensions	WxDxH	mm	1028/600/45	1028/600/45	1348/600/45	1348/600/45
Panel Packaging dimensions	WxDxH	mm	1143/688/170	1143/688/170	1463/688/170	1463/688/170
Panel Net/gross weight		kg	3,9/8,0	3,9/8,0	5,1/9,8	5,1/9,8

AB25 - AB35 - AB50 - AB71

